

Power Line Communication as Alternative for Data Communication Channel for BRT

CAIO FERNANDO FONTANA*1, CLEDSON AKIO SAKURAI*1; CLAUDIO LUIZ MARTE*2;
JOSE ROBERTO CARDOSO*2; ANTONIO GIL DA SILVA ANDRADE*3

*1 Departamento Ciências do Mar (DCMAR)

Universidade Federal de São Paulo (UNIFESP)

Av. Almirante Saldanha da Gama, 89 – Santos/SP, BRAZIL

*2Escolar Politécnica da Universidade de São Paulo, BRAZIL

*3Faculdade de Arquitetura e Urbanismo da Universidade de São Paulo, BRAZIL

Abstract: - The goal of intelligent transportation system (ITS) for Bus Rapid Transit (BRT) is to improve public transportation in relation to safety, usability, mobility, quality and productivity through the use of information and communication technology and one of the main problems is to ensure that which elements of ITS such as buses, sensors, actuators, traffic lights, among others are exchanging data with them, due to the size of this environment, the infrastructure of communication between the transportation management system (TMS) and ITS components is extremely important in this context, this work proposes the use of communication technologies called Power Line Communication (PLC) system, which consists of data communication through the grid network that is available in urban center. Another characteristic of ITS for BRT is that the environment will exchange small data packages, so it is possible to use narrow band technologies. In this paper was considered the evaluation of two initiatives on narrow band PLC, PRIME and G3, which have similar physical layer, and the PRIME privileges the high data rates during favorable conditions and G3 provides better performance on unfavorable conditions. The both projects can be used as a communication data channel for communication between BRT ITS elements, because this communication requests a low bit rate.

Key-Words: - PLC, BRT, bandwidth, Specification, Mobility, Transportation

1 Introduction

The cities of medium and small need to implement a fast and efficient urban transport system to meet the population's needs and offer a cost-effective and quality service in this context several Brazilian cities have implemented a solution called Bus Rapid Transit (BRT). [1]

The BRT solution is the use of an infrastructure based on exclusive bus lanes with stations with prepayment system. To improve the performance of services, implements up systems that can perform traffic signal prioritization, tracking the bus and through the planning system can achieve the integration between modes of transport.

The implementation of a BRT system requires a lot of planning because of the various components that influence the process such as the layout of

filling stations, vehicle configuration, bus interface to the system, information service to passengers and marketing, among others.

One of component of BRT is the ITS. The ITS system consists of a technology matrix intended for operation and management of urban mobility. It consists of sets of information systems, communication, control, monitoring, sensing, acting and among others. It aims to provide greater operational efficiency to transport and transit operations services as well as provide comfort and safety for users of BRT services. [2][3][4]

One of important aspect is that the management systems needs to communicate with the sensor and actuators networks installed in the city, in order to obtain the real information of each local, so an effective communication system to exchange data between ITS elements are necessary.

Typically, the data communication technologies are available as: pair of wire, dedicated line, radio frequency, mobile and others, but the maintenance and deployment cost often prevents the ITS projects. This paper presents an alternative solution to enable the communication for ITS base on Power Line Communication, because it is possible to use the exiting infrastructure of energy network.

2 Smart Grid

The Smart Grid is very similar to the necessary infrastructure for ITS, because in both cases there is a centralized management system that needs to communicate bi-directionally with the elements that are in the street through a data communication line. In this context, considering that the energy service providers have their power line distribution installed in the city and also its need to receive data in its entirety, the enterprise responsible for the monitoring of transport could use the same infrastructure communication through the PLC, reducing communication costs of their ITS. This paper focuses on evaluation of data communication technology that is common for the Smart Grid and ITS.

3 Telecommunications Technologies

The following communications technologies can be used to ITS:

- Dedicated Line or Dedicated wired data networks can be designed to comply all requirements, however the implementation costs depends directly on the distance between locations.
- Radio Frequency (RF) is the technology based on the communication of data over radio waves, where the frequencies used worldwide are controlled by the ITU (International Telecommunication Union) and ANATEL (National Agency of Telecommunication) in Brazil. The frequency spectrum is divided into tracks where each track has a well-defined characteristics, the free track frequencies are the ranges of 2.4 GHz and 915 MHz. The scope of an RF communication may vary depending on the signal strength of the transmitter module and has a low cost compared to other technologies. However, the issue of accreditation and certification of the radios by the regulatory agency may be an problem. The radio could be a point-to-

point or point-to-multipoint (mesh topology). At point-to-multipoint is possible to make broadcast communication between various locals and it is possible to achieve a large coverage area with an emphasis on low power operation.

- GSM (Global System for Mobile Communications) or GPRS (General Packet Radio Service) is an alternative due to installation cost and coverage area, however there is a strong operator dependent services. The GSM is a mobile technology that is be used in over 200 countries and more than one billion of people. At GSM the signal and the voice channels are digital, then the data communication is available. The method used by GSM frequencies is to manage a combination of two technologies: TDMA (Time Division Multiple Access) and FDMA (Frequency Division Multiple Access). The bit rate on GSM is around 9.6 Kbit/s, so there is a limited bandwidth. The GPRS is a technology that increases the rate of data transfer in GSM infrastructure. This allows the transport of packet data, so it provides a higher transfer rate (56 to 114 Kbit/s) than previous technologies, because it uses circuit switching. The GPRS has as main advantage the huge infrastructure of the telephone network operator, but has disadvantages such as cost and small and inconsistent coverage in rural areas. [4];
- PLC (Power Line Communication) is a communication system that uses the power line distribution cable to transport telecommunications services, so it allows data communication over the grid at low, medium and high voltage, with the advantage of use existing physical resources.

3 Evaluation of PLC for ITS

The Power Line Communication (PLC) is a technology that uses the power live distribution cable, then for communication using PLC, each user must have a PLC modem. Due to the transformers some signal are blocked, so it is necessary a bridge to cross it. Some applications use PLC on frequencies below 60Hz, allowing the signals to pass through transformers, but these signals transmit data at low speeds. The factors responsible for low capacity of data communication are changes in impedance, high levels of noise caused by switching

the signs and inductors. This degradation in the communication rate caused by noises often restricts the applicability of the technology. Other issues still need better solutions such as electromagnetic compatibility, lack of standardization and better regulatory policies.

At PLC technology to provide data communications via broadband to power utility stations some elements may be needed as blocking elements to be cancelled in the interference problems hubs and RF repeaters to increase the signal levels.

The broadband PLC is a communication system to provide broadband services (voice, data, multimedia, video, etc.) cabling using high voltage electric system that belongs to the existing electric utilities. The scope of the PLC is the provision of broadband services using one or more power cables in the distribution network, while simultaneously electricity is provided. The RF signal is modulated at the first point with the data signal and inserted into the distribution network, which serves as a communication channel. At second point, the RF signal is recovered from the power grid with a modulated signal demodulator for recovering the original data signal. The data is sent from the second to the first point in a similar way, only changing the frequency band. The broadband service is full-duplex, simultaneous two-way communication, between two locations.

The narrow bandwidth PLC does not require changes in the distribution network and no additional equipment for packaging distribution transformer. The communication is not affected by equipment or abnormal conditions that may exist in the electric distribution network, such as capacitor banks, transactions for underground electric lines, voltage dips and harmonics. There are no blind spots for the system, which could be caused by phenomena of standing waves generated by the extension of electric power supply or on its configuration.

Due to the characteristic of each system, the present paper will analyse performance of narrow bandwidth PLC to monitoring services of ITS.

This paper consider the use of Narrow Band PLC in Intelligent Transport System, as a communication channel between the ITS elements and the CCO (Operation Center Control), for both are considering the topology shown in Figure 1. To evaluate the scenario, the present paper consider the following initiatives:

- PRIME (PoweRline Intelligent Metering Evolution) is focused on the development of a new open, public and non-proprietary

telecommunications solution which will support not only smart metering functionalities but also the progress towards the smart grid. The PRIME has specified a PLC that uses a OFDM (orthogonal frequency-division multiplexing), open and non-proprietary with focus on interoperability among equipment and systems from different manufacturers.

- G3 PLC is focused on the definition of an open standard for smart grid implementation. The G3 PLC is a standards-based power line communications specification promoting interoperability in smart grid implementations.

Booth projects using the OFDM to modulate the signal in narrowband PLC. The OFDM signal is characterized by the sum of several sub-orthogonal carriers, with the data of each sub-carrier being independently modulated using some form of QAM or PSK. This signal baseband is used to modulate a main carrier, used to communication via radio frequency. The advantages of using OFDM are many, including high efficiency spectral immunity against multipath and noise filtering simple.

Combining OFDM with error correction techniques, adaptive equalization and reconfigurable modulation, It has the following properties: [12]

- Resistance to optical dispersion;
- Resistance slowly changing phase distortion and fading;
- Resistance against multipath using guard interval;
- Resistance against frequency response null and frequency interference constant;
- Resistance against burst noise.

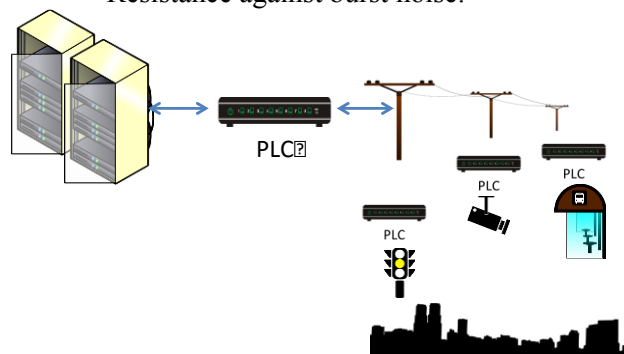


Fig. 1 Scenario for ITS and PLC

The parameters of each project is presented on figure 2, the structures and choices of coding parameters used in G3 and PRIME have unique features and merits can be synthesized and optimized to produce a single coding structure that can yield high performance with low complexity in

a variety of conditions noise.

PRIME provides high rate data communication through the use of un-coded mode, since the G3 privileges the issue of robustness by supplementation of the convolutional code with a Reed Solomon (RS) outer code defined and uses repetition rate code 1 / 4 convolutional end code in output.

Moreover PRIME supports interleaving on the entire package of physical layer in only one symbol in 2.048 ms. The G3 does the intercalation of the whole package of physical layer, up to 252 taking symbols in each 640 micro seconds.

The structures of coding and parameterization used in G3 and PRIME have unique characteristics and merits, and can be synthesized and optimized to produce a single coding structure that can yield high performance with low complexity in a variety of noise conditions.

Although, the activities for exclusive monitoring of ITS there is no need high bandwidth communication capacity, and it is necessary that quality of services of data communication and / or allow the network performance meet the requirements of real time.

The narrowband interference occurs mainly in low voltage distribution due to narrowband communications systems and television receivers screen refresh rate. This paper considers the use of narrowband PLC at low voltage.

At PRIME and G3 PLC the different noise levels and impedances on the same network can create a good communication level in one direction and a worst communication level in opposite direction, so it is necessary to evaluate each direction separately.

Parameter	PRIME	G3
Nominal sample Frequency	250 KHz	400 KHz
FFT Length	512	256
Modulation	Frequency-Differential	Time-Differential
Type of Modulation	DBPSK DQPSK D8PSK	DBPSK DQPSK
Channel interleaving	One symbol(2,048 ms)	Across symbols over the whole packet up to 256 symbols, each with 640 ms.

Fig. 2: Specification of PLC

The magnitude of transfer function could be verified through the transmission of block with constant magnitude on neighboring frequency bands, so the receiver detects these like OFDM symbols and performs a FFT (fast Fourier transform). [6]

The SNR (signal-noise relation) is an important

criteria for evaluation of data communication, so it is necessary to analyses the signal in frequency and time domain intensive communications tests on different frequencies, considering several bandwidths and type of modulation are performed in each situation.

The results permit to compare PRIME and G3, considering: [6]

- Number of received synchronization;
- Number of correct packets;
- Maximum and average value of the gain selected by AGC (Automatic Gain Control) during the synchronization.

The energy distribution environment is extremely complex because it depends on several elements that are meeting the network as resistance wiring, transformers, repeaters, among others.

So it is difficult to predict the behaviour of data communication through PLC, which can be worsened with the amount of nodes that exist in the distribution line.

This paper evaluate the PLC narrowband as means of transmitting data between the sensors and the ITS systems on medium voltage lines (13.8 kV), which concludes that the transmission is feasible because the medium voltage lines interference and the noise is low, moreover, as the application of monitoring does not require high sustained transfer rate, this allows the PLC to operate with greater simplicity.

For that, this work considered the evaluation of PRIME and G3 PLC, which have similar physical layer, and the PRIME privileges the high data rates during favorable conditions and G3 PLC provides better performance on unfavorable conditions. Both projects can be used as a transmission data channel for communication between sensors and ITS systems, due to the low bit rate required.

The initial tests started with two modems composed of F28069 controller board and AFE031 board to wire PLC, both of Texas Instruments. These modems come shipped with PRIME as the communication protocol between the PLCs, with the following characteristics:

- Operating frequency in the range 40-90 kHz (CENELEC A)
- Data rates from 21 kbps to 128 kbps
- Transmission made with OFDM (Orthogonal frequency-division multiplexing) and FEC (forward error correction)
- Modulation phase shift (DBPSK/DQPSK/D8PSK)

- Automatic Gain Control (AGC)
- Support for layers PRIME PHY, MAC, and IEC61334-4-32 LLC
- Ports with USB and RS-232 for control and as host for data transmission

The initial tests performed in the laboratory analyzed the behavior of different scenarios in modem connection settings for the equipment and modulation, gain and different packet size.

The scenarios analyzed in this report are:

- Direct cable 100m: Both modems were connected to each other via a cable of 100 meters and were not connected to any power network, and the only electrical signal through the wire is the signal generated by the PLC.
- Connection through the electrical grid of laboratory: this scenario the communication between the modems was made linking them in electrical grid of 110 volts present in the laboratory. They were ligated in two places near the same phase.

In order to verify and analyze the operation of the modem to the different situations was used PLC application Quality Monitor, used to change the modem settings when using PRIME. The settings are varied to check the behavior of the PLC are:

- Modulation: There are 3 different modulations to the modem using PRIME: DBPSK, DQPSK, D8PSK
- FEC (Forward Error Correction): FEC adds redundancy to the transmitted signal to reduce errors in transmission.
- Transmitter Gain: the gain of transmission can be changed and there are 8 different levels ranging from 3db gain among themselves.
- Receiver Gain and AGC (Automatic Gain Control): The receiver can be set to use automatic gain control that adjusts the gain of the receiver to present less variation and better output signal. Furthermore it is possible to adjust the receiver gain manually to choosing among eight levels ranging from 6dB to each other.
- Curve Data: The program allows you to pass three different kinds of data packet, and they fixed a byte, a ramp that ranges from 0 to 255 and the standard of certification data PRIME consisting of two sentences (PRIME IS A WONDERFUL IS TECHNOLOGYPRIME A WONDERFUL TECHNOLOGY) with no space between them.
- Size PDU (Physical Layer Protocol Data

Unit): This size varies from 1 to 765 bytes when the FEC is disabled and 1 to 377 bytes when the FEC is enabled.

In both scenarios the modems were configured to transmit data with a slope of 125 bytes and PPDU with AGC on. The reason for the size of the PPDU was chosen due to the behavior of the BER curve X PPDU that indicated only for very small values of PPDU that effectively changed the rate. As in actual cases of continuous transmission of the PPDU value tends to be near the maximum value was used a small value not presenting the same values for BER PPDU that in cases of large.

For direct connection with 100 meters of cable, initially was analyzed the operation of the modem conditions of scenario 1 above, where the modems were connected directly to each other with a 100m cable between them just where he passed the signal generated by the PLC. In this situation was expected that in whatever chosen modulation even without the FEC activated, the signal data transmission errors not present and also the SNR would be low, as there were no external interference and impedance of the wire was too low to affect the transmitted signal.



Fig. 3: SNR x RSSI

The figures 3 and 4 show the signal to noise ratio and the error rate for the six variations of modulation.

Both the SNR as BER varies due to the gain variation of transmission is done during transmission, where the moments in which it can be noticed varies by more abrupt variations in curves

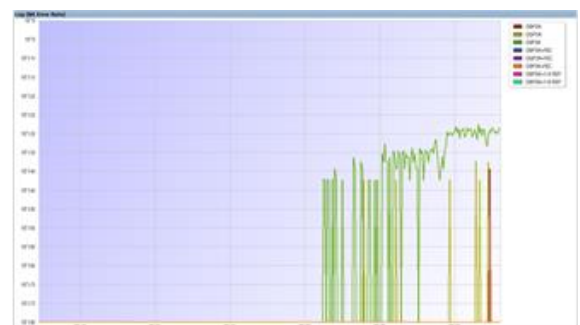


Fig. 4: Bit error Rate with Several Modifications

As expected, the above figures show that even for values slightly below the maximum gain of the transmitting PLC showed high reliability even with zero error rate for the three modulations even without the FEC. It can only observe non-zero values of bit error rate with earnings below MOL (Maximum Output Level) -15dB when the FEC is not enabled, and when using the FEC transmission shows no error even for low SNR. Using then a gain of transmitting up to 9dB below the maximum reliability can be guaranteed at a maximum transmission rate of 128kbps with the modulation D8PSK without using FEC.

4 Conclusions

The use of PLC Narrowband as data transmission media to the ITS of BRT is feasible, since the interference with power distribution lines is low and the need for data transfer rate is low, which allows the PLC in minimal configuration. The study evaluated the PRIME and G3 projects that have similar physical layer, and PRIME is more favorable for high data transfer, and G3 delivers better performance in interference and noise conditions, but both projects can be used as a communication solution for ITS of BRT. In laboratory it was evaluated successfully PRIME, so that next step is to evaluate the performance by installing equipment in the field. In the field tests will evaluate the quality of services and performance parameters of PLC technology in real conditions of use.

5 Acknowledge

We appreciate the support of Prefeitura de São José dos Campos - SP - Brazil which enabled this research. The survey results are being applied in city hall of specific projects in infrastructure, traffic and transportation.

References:

[1] D. Falcão, "Integração das Tecnologias para Viabilização da Smart Grid". Available at www.labplan.ufsc.br.
[2] C. Cecatti at Al, "An overview on the smart grid concept". Presented at IECON 2010 - 36th Annual Conference on IEEE Industrial Electronics Society, pp. 3322–3327, Dec. 2010.
[3] ANEEL. "Resolução No. 394". ANEEL. Dez

2008.
[4] R. Benato, R. Caldon. "Application of PLC for the control and the Protection of Future Distribution Network". IEEE. 2007.
[5] Kim, B. Varadarajam, A. Dabak. "Performance Analysis and Enhancement of Narrowband OFDM Powerline Communications Systems". IEEE 2010.
[6] G. Bumiller. "Automated Channel and Performance Measurements for Narrowband MV and LV Power Lines. IEEE. 2007.
[7] T. Sauter and M. Lobashov, "End-to-end Communication Architecture for Smart Grids" IEEE Transactions on Industrial Electronics", vol 58, no. 4, Apr. 2011.
[8] M.Duarte, et al., "Sistema de Leitura Automática de Medidores Eletrônicos de Energia Elétrica para o Meio Rural", presented at SENDI 2010- XIX Seminário Nacional de Distribuição de Energia Elétrica, Nov. 2010.
[9] K.Razazian et al., "G3-PLC Specification for Powerline Communication: Overview, System Simulation and Field Trial Results", presented at IEEE ISPLC 2010: 14th IEEE International Symposium on Power Line Communications and its Applications, Mar. 2010.
[10] D.W.Rieken and M. R. Walker II, "Distance Effects in Low-Frequency Power Line Communications", presented at IEEE ISPLC 2010: 14th IEEE International Symposium on Power Line Communications and its Applications, Mar. 2010.
[11] Lasciandare et al., "STarGRID™: the first industrial system on chip platform full PRIME compliant", presented at IEEE ISPLC 2010: 14th IEEE International Symposium on Power Line Communications and its Applications, Mar. 2010.
[12] A.Haidine et al., "High-Speed Narrowband PLC in Smart Grid Landscape – State-of-the-art", presented at IEEE ISPLC 2011: 15th IEEE International Symposium on Power Line Communications and its Applications, Apr. 2011.
[13] A.Sendin et al., "Strategies for PLC Signal Injection in Electricity Distribution Grid Transformers", presented at IEEE ISPLC 2011: 15th IEEE International Symposium on Power Line Communications and its Applications, Apr. 2011.
[14] L. Yang and C. Feng, "Design of Traffic Lights Controlling System Based on PLC and Configuration Technology", presented at MINES 09 International conference on multimedia information networking and

- security, Nov, 2009.
- [15] A. Haidine et al, “High-speed narrowband PLC in Smart Grid Landscape – State of the Art”, presented at IEEE International conference on power line communications and its applications, Apr. 2011.
- [16] P. Mlynek, M. Koutny, J. Misurec. Power line modelling for creating PLC communication system. International Journal of Communication. Issue 1, Volume 4. 2010.
- [17] H. Hou, G. Li. Cross-layer Packet Dependent OFDM Scheduling Based on Proportional Fairness. WSEAS Transactions on Communications., Volume 11. Issue 1. 2012.
- [18] Y. Huang et Al. Performance of Partial Parallel Interference Cancellation With MCCDMA Transmission Techniques for Power Line Communication Systems. WSEAS Transactions on Communications., Volume 7. Issue 1. 2008.
- [19] Turucu, C. Turucu C. Gaitan, V. Integrating Robots into the Internet of Things. International Journal of Circuits, Systems and Signal Processing. Issue 6. Volume 6. 2012. p430-437
- [20] Surinwarangkoon, T. Nitsuwat, S. Moore, E.J. A Traffic Sign Detection and Recognition System. International Journal of Circuits, Systems and Signal Processing. Issue 1. Volume 7. 2013. p58-65
- [21] Matysek, M. Kubalcik, M. Mihok, M. Monitoring of Computer Networks Resources.. International Journal of Circuits, Systems and Signal Processing. . Issue 1. Volume 7. 2013. p75-82.
- [22] Wessels, A. Jedermann, R. Lang, W. Transport Supervision of Perishable Goods by Embedded Context Aware Objects. International Journal of Circuits, Systems and Signal Processing. . Issue 3. Volume 4. 2010. p102-111.
- [23] SECRETARIA NACIONAL DE TRANSPORTE E DA MOBILIDADE URBANA. Manual de BRT: Guia de Planejamento. 2008.
- [24] APTA STANDARDS DEVELOPMENT PROGRAM. Implementing BRT Intelligent Transportation Systems. 2010.
- [25] INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. ISO 14813-1:2007 – Intelligent transport systems – reference model architecture(s) for the ITS sector – part 1: ITS service domains, service groups and services. 2007.
- [26] US Department of Transportation. National ITS Architecture 7.1. Available on: <http://www.iteris.com/itsarch/index.htm>. Accessed on October 2015.
- [27] NTU – Associação Nacional das Empresas de Transportes Urbanos (National Association of Urban Transportation Companies). Avaliação comparativa das modalidades de transporte público urbano (Comparative evaluation of public transportation modes). Prepared by Jaime Lerner Associated Architects. Brasília, 2009.
- [28] NTU – Associação Nacional das Empresas de Transportes Urbanos (National Association of Urban Transportation Companies)]. Conceitos e Elementos de Custos de Sistemas BRT (Cost concepts and elements of BRT systems). Prepared by Logit. Brasília, 2010. 72 p.
- [29] AUSTRALIA. AUSTRROADS. Defining Applicability of International Standards for Intelligent Transport Systems (ITS).AP-R338/10. 2010. 111 p.
- [30] BRASIL. Ministério das Cidades (Ministry of Cities), Secretaria Nacional de Transporte e da Mobilidade Urbana (National Secretary on Urban Transportation and Mobility), BRT (Bus Rapid Transit) Manual – Planning Guide. Brasília, 2008..
- [31] CANADA. ITS Canadá (ITSCa). ITS Architecture (version 2.0). Available at <http://www.tc.gc.ca/innovation/its/eng/architecture.htm>. Accessed July 2015.
- [32] RITA (Research and Innovate Technology Administration). Available at www.its.dot.gov. Accessed July 2015.
- [33] B. WILLIAMS, Intelligent Transport Systems Standards. Artech House, 2008. 878 p.
- [34] D. GORNI, Modelagem para Operação de Bus Rapid Transit – BRT (Operational Modelling for BRT). Mestrado (Master Thesis) - Escola Politécnica (Polytechnical School), Universidade de São Paulo (USP), São Paulo, 2010.
- [35] C. L. MARTE, Sistemas Computacionais Distribuídos aplicados em Automação dos Transportes (Automated Transportation Distributed Computational Systems). Tese Doutorado (Doctor Thesis) - Escola Politécnica (Polytechnic School), Universidade de São Paulo (USP), São Paulo, 2000.
- [36] V. N. KASYANOV, Methods and Tools for Structural Information Visualization, WSEAS Transactions on Systems, Issue 7, Volume 12, 2013, pp. 349-359.
- [37] T. MANTORO, A. I ABUBAKAR, M. A. AYU, 3D Graphics Visualization for Interactive Mobile Users Navigation, WSEAS Transactions on Systems, Issue 8, Volume 11,

2012, pp. 453-464.

- [38] I. IVAN, M. DOINEA, C. CIUREA, C. SBORA, Collaborative Informatics Security in Distributed Systems, WSEAS Transactions on Systems, Issue 11, Volume 11, 2012, pp. 628-637.
- [39] S. I. NITCHI, A. MIHAILA, Collaborative Knowledge Management, WSEAS Transactions on Systems, Issue 11, Volume 11, 2012, pp. 648-658.
- [40] YOSHIOKA, L. R. ; OLIVEIRA, M. C. ; MARTE, C. L. ; FONTANA, C. F. ; SAKURAI, C. A. ; YANO, E. T. . Framework for designing automotive embedded systems based on reuse approach. International Journal Systems Applications, Engineering & Development, v. 8, p. 9-17-17, 2014.
- [41] SAKURAI, C. A.; MARTE, C. L. ; YOSHIOKA, L. R. ; FONTANA, C. F. . Integrating Intelligent Transportation Systems Devices Using Power Line Communication. international journal of energy, v. 8, p. 36-42, 2014.
- [42] FONTANA, C. F. ; PAPA, F. ; MARTE, C. L. ; YOSHIOKA, L. R. ; SAKURAI, C. A. . Intelligent Transportation System as a Part of Seaport Terminal Management System. international journal of systems applications, engineering & development, v. 8, p. 41-46, 2014.
- [43] YOSHIOKA, L. R. ; MARTE, C. L. ; MICOSKI, M. ; COSTA, R. D. ; FONTANA, C. F. ; SAKURAI, C. A. ; CARDOSO, J. R. . Bus Corridor Operational Improvement with Intelligent Transportation System based on Autonomous Guidance and Precision Docking. international journal of systems applications, engineering & development, v. 8, p. 116-123, 2014.
- [44] FERREIRA, M. L. ; MARTE, C. L. ; MEDEIROS, J. E. L. ; SAKURAI, C. A. ; FONTANA, C. F. . RFID for Real Time Passenger Monitoring. Recent Advances in Electrical Engineering, v. 23, p. 170-175, 2013.
- [45] SAKURAI, C. A.; MARTE, C. L. ; YOSHIOKA, L. R. ; FONTANA, C. F. . Optical Character Recognition Technology Applied for Truck and Goods Inspection. Recent Advances in Electrical Engineering, v. 23, p. 207-214, 2013.
- [46] MARTE, C. L. ; YOSHIOKA, L. R. ; MEDEIROS, J. E. L. ; SAKURAI, C. A. ; FONTANA, C. F. . Intelligent Transportation System for Bus Rapid Transit Corridors (ITS4BRT). Recent Advances in Electrical Engineering, v. 23, p. 242-249, 2013.
- [47] SAKURAI, C. A.; FONTANA, C. F. ; YOSHIOKA, L. R. ; MARTE, C. L. ; SANTOS, A. S. . License Plate Recognition as a tool for Fiscal Inspection. In: 21st World Congresso n Intelligent Transport Systems and ITS America Annual Meeting, 2014, Detroit. Reinventing Transportation in our Connected World. Red Hook, NY: Curran Associates INc., 2014. v. 1. p. 360-371.
- [48] MARTE, C. L. ; FONTANA, C. F. ; SAKURAI, C. A. ; YOSHIOKA, L. R. ; PERON, L. ; FACIN, P. L. M. . Deploying ITS Sub architectures over IMS (4G NGN). In: ITS World Congress 2013, 2013, Tolyo. Proceedings of the 20th World Congress on Intelligent Transport Systems (ITS), 2013.
- [49] SAKURAI, C. A.; FONTANA, C. F. ; MACCAGNAN, C. M. . Smart Grid as an infrastructures for Intelligent Transport Systems. In: 19th ITS World Congress, 2012, Viena. 19th ITS World Congress, 2012.

Creative Commons Attribution License 4.0 (Attribution 4.0 International, CC BY 4.0)

This article is published under the terms of the Creative Commons Attribution License 4.0

https://creativecommons.org/licenses/by/4.0/deed.en_US